


TeleHawk Systems

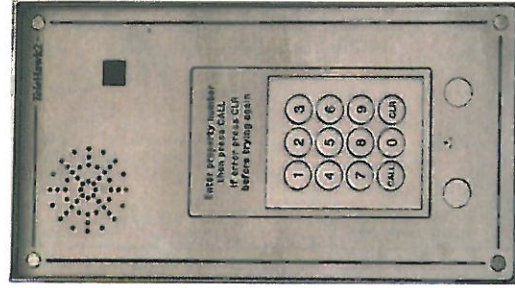

USER MANUAL

Veermount Technology Ltd
15 Ancaster Crescent
New Malden, Surrey, KT3 6BD

Email: jmoore@veermounttechnology.co.uk
Tel: 020 8241 6161 Fax: 020 8241 6515

Simple guide to operation

This covers the use of the TeleHawk 2 product by the visitor and resident.

Visitor

The visitor should enter the property number at the door panel and press the "CALL" button. If the wrong number has been entered press the "CLR" to cancel the call and press "CLR" if the panel does not respond.

Should the number be engaged an engaged tone will be heard, press the "CLR" button and wait a minute and try again.

The panel will automatically redial a second number if the first one is busy or unanswered provided this feature has been used and a 2nd number has been entered. No action is necessary by the visitor.

Once the call has been established the visitor will hear a Bing Bong and then they will be able to speak to the property owner they have called.

Property owner

When the owner receives a call from the panel. They will hear a Bing Bong announcing the panel is calling and then they will be able to speak to the person at the door and establish who they are. Once they have done this and want to open the door they enter on the Telephone keypad 1* to open the door and 2* to open a gate. This is dependant on how the system has been installed.

Pin Access

Another way to enter is by the use of a pin number, providing the number has been programmed into the system, you can enter by the following method Press "CALL" enter the pin number maximum 6 digits followed by "CALL" this will also open the door.